




Installation Guide Model 1013


Patent Pending

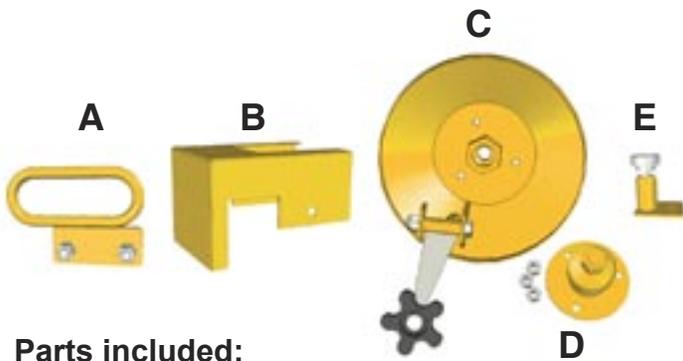


Parts included:

- A - Grip Handle
- B - Winch Guard
- C - Dual Drive™ Winch Handle
- D - Drill Drive™ Winch Hub
- E - Drill Drive™ Adapter and Storage Socket

Tools Needed: Adjustable wrench, 1/2" wrench, 9/16" wrench, small screw driver

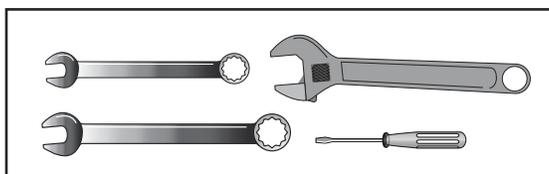

NOTE: This Drill Drive™ Winch System is designed to be compatible with Genuine GILLIFT™ or Cabinetizer™ Brand Cabinet/Material Lifts manufactured by Telpro Inc. Use in any other application or for any other purpose may be unsafe and is not recommended.

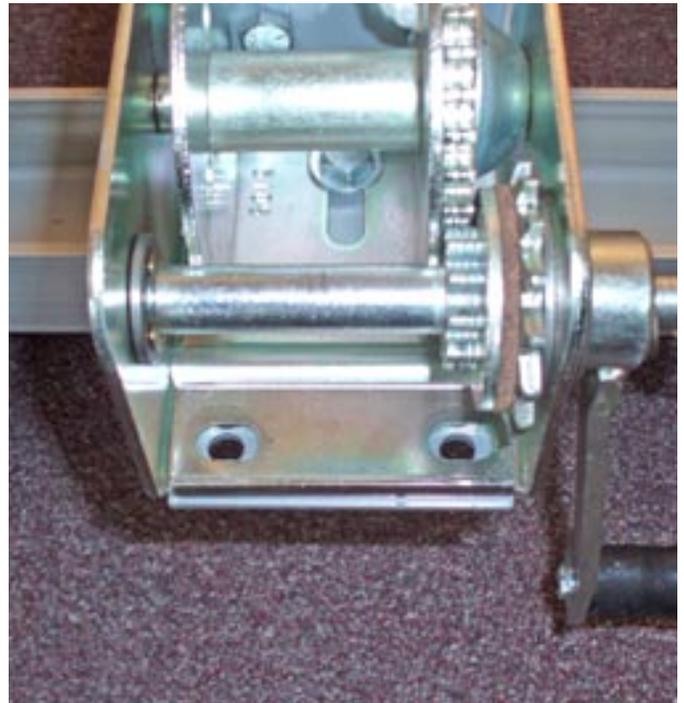

1) Remove the two rear winch mount bolts (leave the third bolt in place)



2) Install the grip handle as shown. Make sure the off set is to the left as shown to allow proper operation of the winch handle.



3) Remove the axle bolt and nut on the winch spool and set it aside.



5) Remove the standard winch handle, nut, and spring.



4) Install the winch guard and fasten in place with the 4 1/2" Bolt and lock nut provided for the winch spool axle bolt. (The bolt removed in step 3 above will be too short.) Tighten the lock nut enough to hold securely but not so much as to compress the winch spool housing.



6) Install the Drill Drive™ winch handle by screwing it onto the winch drive shaft.



7) Install the winch handle spring as shown with the wide end in first and the narrow end out.



9) Install the Drill Drive™ winch hub (**NEVER** try to use a drill to operate your Drill Drive™ winch system without this hub securely installed).



8) Install the winch nut and fasten securely in place. (You will find it helpful to lock the winch from rotating while tightening the winch nut by carefully inserting a small screw driver into the gear mechanism.)




10) Install the storage post for the drill adapter.

For Model 76 Cabinetizer™, bolt it to the angle flange on the side of the collar.


For Model 70 Gillift™, drill a 13/64" mounting hole in the angle flange on the collar.

! WARNING !

NEVER try to use a drill to operate your lift by applying rotating force to the winch handle nut installed in Step 8. Doing so will cause the brake mechanism to malfunction resulting a sudden and rapid lowering of the lift and load possibly resulting in severe property damage and or bodily injury.

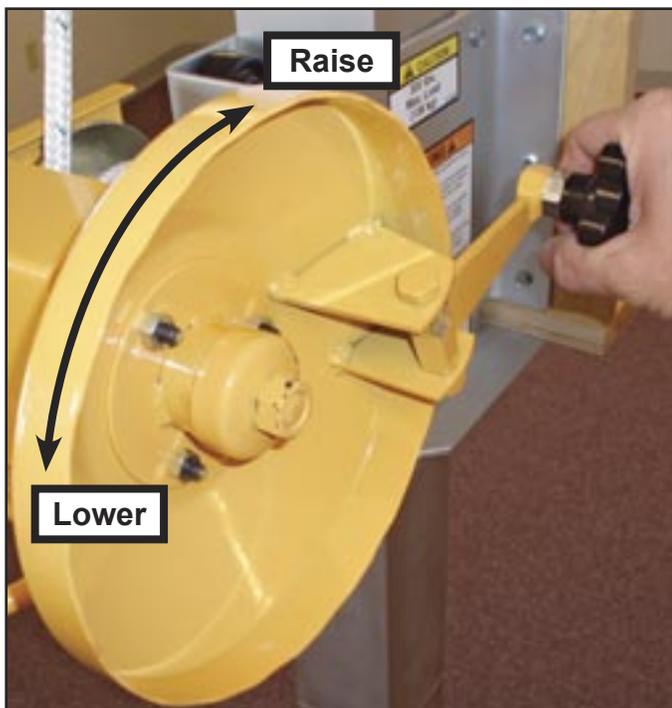

To operate the winch manually and for fine height adjustment, swing out the winch handle and rotate the winch drum. **MAKE SURE** that a clicking sound is heard indicating that the automatic winch brake is functioning properly.

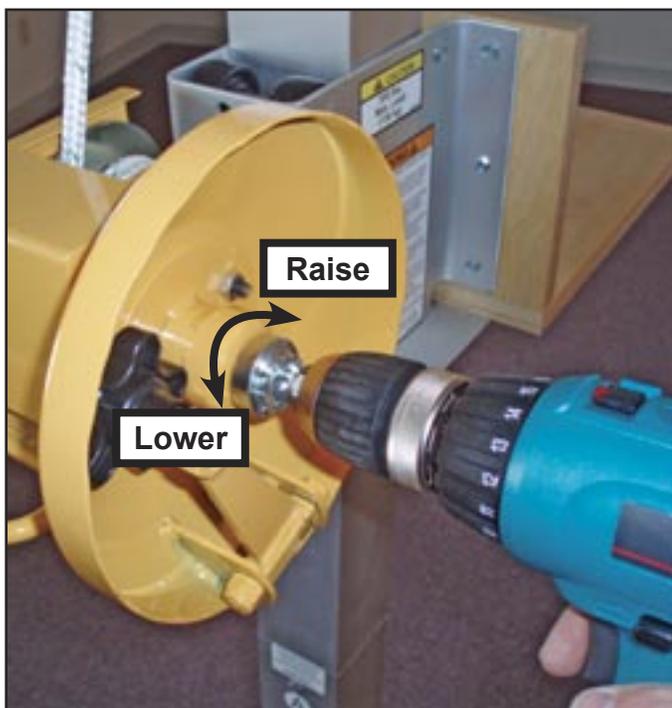

To operate the winch using a drill - fold in the manual winch handle, install the drill adapter and run the drill in forward to raise the lift and in reverse to lower the lift.

- **DO NOT** use a drill to operate the winch while the manual winch handle is out in the operating position.
- **DO NOT** use an impact driver or impact drill to power the Drill Drive Winch System. The resulting percussive force may damage the winch mechanism. **MAKE SURE** that a clicking sound is heard indicating that the automatic winch brake is functioning properly.

Questions or problems with installing your DRILL DRIVE™ Winch System?

Contact Telpro Customer Service

Telpro Inc.

701-775-0551

1-800-448-0822

Check out our other growing product lines at www.shop.telproproducts.com

Thank you for choosing the Drill Drive™ Winch System for your GILLIFT™ or Cabinetizer™ Cabinet/Material Lift. We are pleased that we are able to provide equipment to make your work easier.

Our efforts are focused on producing the finest quality equipment of which we are capable. We know that extra time and effort spent on our part to design and produce a high quality finished product will mean time and effort saved on your part when you use it. This is important to us.

Foundational to all of our work at Telpro Inc. is the fact that God is our creator. It is our desire to honor him in our work and business relationships. We are able to provide equipment to ease only your physical labor. But Jesus said, "Come to me, all you who are weary and burdened, and I will give you rest. Take my yoke upon you and learn from me, for I am gentle and humble in heart, and you will find rest for your souls. For my yoke is easy and my burden light."

Jesus also said, "I have come that they might have life, and have it to the full." The Apostle Peter said, "Salvation is to be found through him alone; in all the world there is no one else whom God has given who can save us...Leave all your worries with him because he cares for you."

Thank you again for giving us the opportunity to work with you. Any questions or comments that you may have regarding our equipment or company are always welcome.

Telpro Inc.